



MODLIFT SERIES

MODULAR INGROUND AXLE ENGAGING LIFTS

2 AND 3 POST SERIES / 64,000 LBS. TO 105,000 LBS. CAPACITIES



The industry's first and only remote-controlled wireless system

The most versatile and inventive in-ground lift to ever hit the industry.

POWERED BY
RedFire

MOD FLEX™ LIFTS Powered by exclusive RedFire® Technology.

Experience the unmatched mobility and flexibility to fit your specific shop needs.



 PROUDLY MADE IN
MADISON, INDIANA



 ENVIRONMENTALLY-
FRIENDLY

www.RotarySolutions.com

Shown: MOD235X3A2BK
2-post modular in-ground lift / 70,000 lbs. capacity



MOD SERIES INGROUND LIFTS

The next generation of heavy-duty modular inground lifts from the inventor of the inground lift.



ROTARY MODULAR INGROUND LIFT ADVANTAGES

Axle-engaging lifts available in two and three post series for tandem vehicles.

Recessed, unobstructed floor designs with control, adapter, and wheelbase options.



LEARN MORE ABOUT MOD LIFTS

Reduce costs with Rotary's patented installation and construction methods.

The modular, encapsulated enclosure pit design reduces installation costs and lessens costly maintenance. This six-foot deep containment housing design allows for easy access to all lift components.

System monitoring and added controls

Programmable Height and Wheelbase Settings for up to 25 preset vehicle locations - the most in the industry.

Auto Spotting System allows for automatic positioning without crawling around on floor.

VEC™ Variable Equalization and Control System eliminates the need to manually adjust valves to control location, speed and heights. Jacks are individually controlled for vehicle spotting or simultaneously for lifting.

MOD35 FLEX™ Modular Lifts

**FLEX™ Remote Control Operation
Powered by RED FIRE®**

*THE INDUSTRY'S ONLY HANDHELD,
REMOTE-CONTROLLED WIRELESS SYSTEM*

MOD235 TWO POST LIFT / 70,000 lbs. capacity

- Includes 1 movable jack and 1 fixed jack

MOD335 THREE POST LIFT / 105,000 lbs. capacity

- Includes 2 movable jacks and 1 fixed jack

MOD32 Modular Lifts

Standard with Console Control Operation*

MOD232 TWO POST LIFT / 64,000 lbs. capacity

- Includes 1 movable jack and 1 fixed jack

MOD332 THREE POST LIFT / 96,000 lbs. capacity

- Includes 2 movable jacks and 1 fixed jack

* Console controls are standard on the MOD32 - FLEX remote-controlled operations are available as an option



**UNMATCHED LIFTING SAFETY,
FUNCTIONALITY, AND PRODUCTIVITY!**

MOD FLEX™ SERIES HANDHELD REMOTE CONTROL LIFTING SYSTEM

Powered by exclusive RED FIRE® technology, Rotary MOD FLEX™ lifts are the industry's first and only remote-controlled inground lifts.

- Easy to use controller
- Move freely around vehicle and bay
- Eliminates cord management issues
- Reduces inspection time

**POWER
IN THE
PALM
OF YOUR
HAND!**

POWERED BY
RedFire®

The industry's fastest
set up and safest,
easiest operation.



MOD INGROUND FEATURES

- 1 CONCRETE FOOTER SLAB**
Environmentally-friendly design offers a base rebar mat and a 25% reduction in concrete.
- 2 MULTI-STAGE CYLINDERS**
Design minimizes lift housing depth.
- 3 GREASELESS BEARINGS**
The axles are coated with exclusive SmartGuard™ for maintenance free performance.
- 4 DUAL CHAIN DRIVE SYSTEM**
Easy, reliable movement while raising and lowering lifts.
- 5 ELECTRIC DRIVE ASSEMBLY**
Smooth movement while moving to multiple wheelbase settings.
- 6 SLIP CLUTCH DESIGN**
Eliminates chain breaks reducing maintenance issues and cost of lift ownership.
- 7 AUTOMATIC SHUTTER PLATE TRENCH COVERS**
Nitride coated to prevent rust, these automatic shutter plates and covers are self-storing keeping the containment covered at all times (as required by OSHA).




Multi-Stage Locks
Lower-to-lock is standard.

Poured Foundational Concrete Slab


Environmentally Sound Modular Containment Unit

The 6-foot-deep steel enclosure is sealed with exclusive Rotary Lift EnviroGuard™ coating which also coats the axels of our greaseless bearings for maintenance-free performance. Lifts are warranted against corrosion and electrolysis for 10 years.

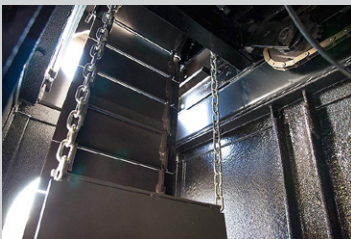

Abrasion Resistant Hose Guide

Guide keeps hose out of the way of the moving piston - there are no moving parts to break.



In-Pit Power Units

Two power units are fully contained in an environmental tub that eliminates soil contamination, bay obstruction, and creates a silent operation.



LDS™ Liquid Detection System

Our patented LDS system monitors the lift and signals the technician as liquid accumulates in the containment.

Built-in access ports allow for easy fluid evacuation.

Separate pumps are located in each jack housing.



INNOVATIVE UNIVERSAL SADDLES AND ADAPTERS

Maximize Versatility and Spotting Range from Four Universal Style Lifting Saddles

Stackable adapter kits with height extensions maximum flexibility when cradling vehicle axles or frames. Reach into areas that other adapters can't access. For use on front and rear saddles.



Adapter kits pivot 360° for precise and safe pick ups



SEE BACK PAGE FOR SADDLE AND ADAPTER OPTION DETAILS

LIFT CONTROL OPTIONS*

Simple Push Button Wall-Mounted Console System

- Eliminate clutter and add floor space
- Easy to understand and operate
- No manual equalization
- Infinite variable speed control of column operations
- Fine adjustment of the lifting carriage or movable piston



OPTIONAL PEDESTAL MOUNT CONTROLS

Operate lifts from a comfortable standing position.



SAVE VITAL BAY SPACE!


Optional Wired Pendant Controls

- Patented joystick-equipped pendant
- Operate all of the lift's features away from the console
- Safer operation with greater visual position points




Pendant shown with optional retractable cord reel
Consult factory for options.

* Console controls are standard
- FLEX remote-controlled operations are available as an option

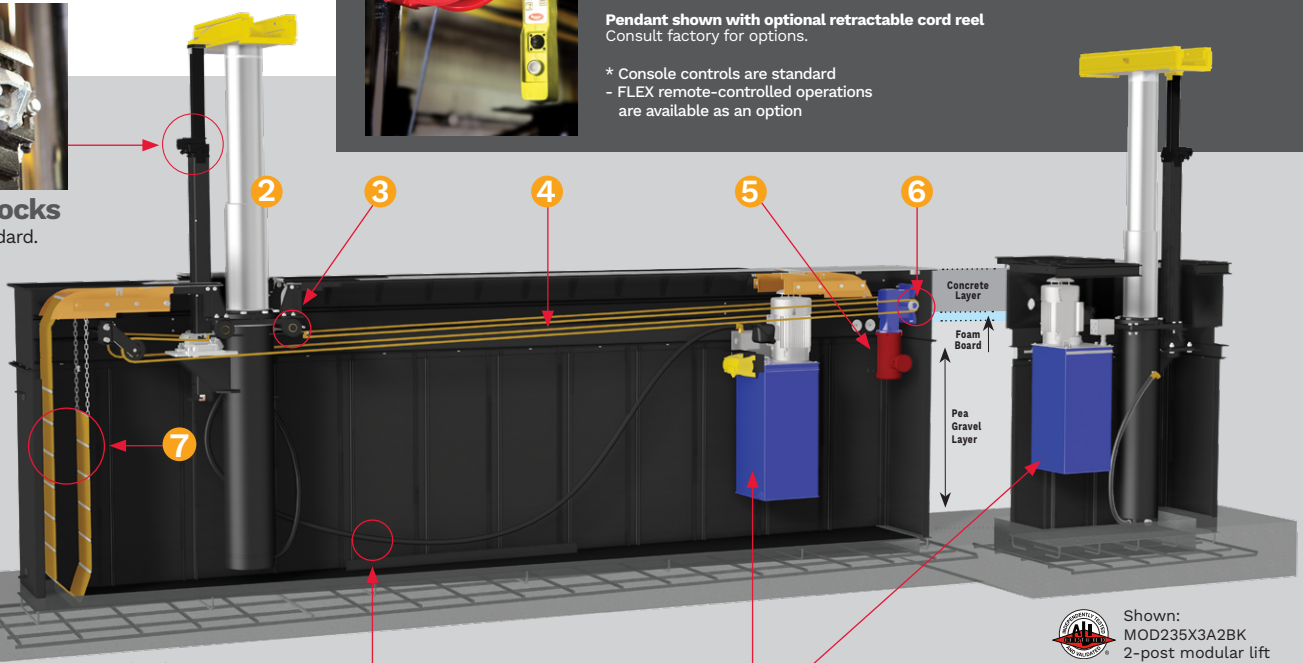

Shown:
MOD235X3A2BK
2-post modular lift
70,000 lbs. capacity

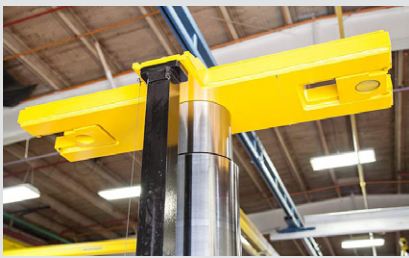

Universal Style Lifting Saddles

FOUR PATENTED SADDLE DESIGNS

STANDARD FRONT POST SADDLE LOW-PROFILE

- 4-1/8" tall - maximum reach of 40-1/2" wide

STANDARD REAR POST SADDLE TALL REAR

- Reach into areas that other adapters can't access
- Features six sliding insert receptacles that provide an incomparable pick-up range.

CUSTOMIZE VEHICLE SPOTTING FROM THESE OPTIONAL SADDLE DESIGNS

OPTIONAL FRONT POST SADDLE ULTRA-LOW PROFILE

- Lowest profile in the industry at just 2-1/2" tall
- Excellent drive-over clearance - can be retracted for zero obstructions when not in use

OPTIONAL WIDE FRONT POST SADDLE LOW TRUCK FRONT (T-Style)


- Pick up vehicles that don't have a solid front axle
- 4-3/4" tall saddle offers the widest reach at 55-1/2"

SADDLE ADAPTER KITS Designed for use on front or rear post saddles

2-POST CONFIGURATION


AK-SB-HTA-2PK

Designed for most School Bus & Heavy Truck applications.

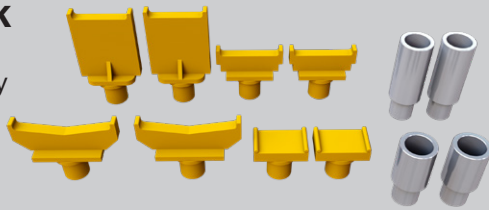

AK-ULP-2PK


Designed for most Low Profile Transit Bus operations.

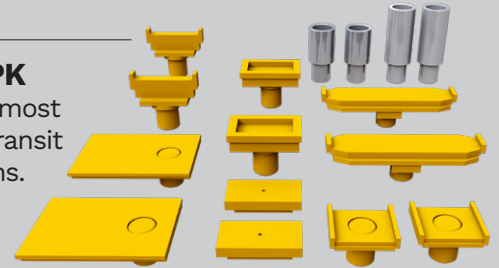

3-POST CONFIGURATION


AK-SB-HTA-3PK

Designed for most School Bus & Heavy Truck applications.

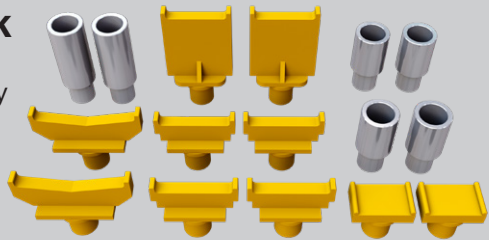

AK-ULP-3PK Non tandem lifts

Designed for most Low Profile Transit Bus operations.

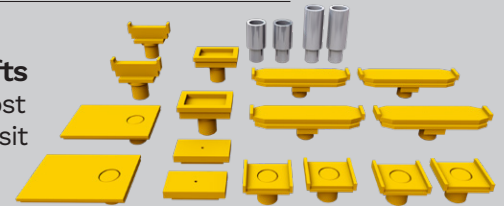

OPTIONAL Adapter Rack

#FD2361BK
Keeps the lift bay uncluttered and all adapters in one place.

Mobile Adapter Cart
#FD2438BK



Adapter Extensions:
#FD2359
#FD2358
Applies to all adapters



OPTIONAL Air Operated Tire Lifts

Includes air hose and air tool connection with pressure regulator to prevent overloading
200 lbs. and 500 lbs. capacities



SHOWN:
#MW-500

SPECIFICATIONS

Models:	MOD235 2-Post	MOD325 3-Post	MOD232 2-Post	MOD332 3-Post
Lifting Capacity	70,000 lbs.	105,000 lbs.	64,000 lbs.	96,000 lbs.
Lifting Capacity Per Piston	35,000 lbs.		32,000 lbs.	
Power Unit	5hp (7.457kw)		5hp (7.457kw)	
Pressure	420 / 455 psi		420 / 455 psi	
Oil Displacement	19.3 gallon		19.3 gallon	
Rise (front & rear piston)	70"		70"	
Rise (center piston)	N/A	70"	N/A	70"
Std. Adapter Adjustment	17 15/16" - 44 1/4"		17 15/16" - 44 1/4"	

Specifications subject to change without notice or liability.



Rotary is the world leader in service bay solutions offering a broad range of equipment and accessories to make any service bay safer and more productive.

For a complete guide to our product offering or to contact your local distributor, visit us at www.rotarylif.com today.

If you need assistance or have questions, we're here to help

800.445.5438 / Sales: insidesales@vsgdover.com / Support: technicalsupport@rotarylif.com



ROTARY

2700 Lanier Drive
Madison, IN 47250, U.S.A.

Lit# MOD SERIES Brochure.2024.01

©2024 VEHICLE SERVICE GROUP®
All Rights Reserved. Unless otherwise indicated, ROTARY, VEHICLE SERVICE GROUP®, DOVER and all other trademarks are property of Dover Corporation and its affiliates. Printed in U.S.A.

Product specifications, part numbers, images and component descriptions are subject to change without notice or liability.